RZR 900 2" REAR RECEIVER

Note:

2" Receiver


PART # 101260

Hardware Kit: HK-319

Kit Components:

2...... M10X1.5 X 30MM Hex Flanged Bolt GR8.8 Steel Zinc


2...... 1/2" SAE Flat Washer GR5 Steel Zinc

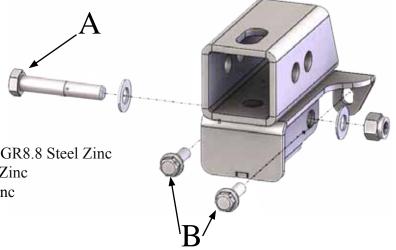


"Figure 1" Exploded View

INSTALLATION INSTRUCTIONS:

- 1. Remove 1 1/4" receiver hitch or attachment if currently installed, so the 2" receiver can be installed.
- 2. Place the 2" receiver over the factory receiver. Install the supplied 1/2" bolt (A) through the pin hole and the two M10 flange bolts (B) into the factory threaded holes on each side of the receiver (C). (see figure 2 & 3)
- 3. Tighten all hardware.
- 4. Do not exceed recommended tongue or towing weight.

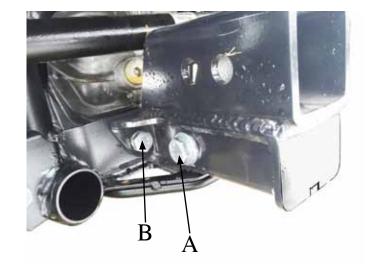

"Figure 2"

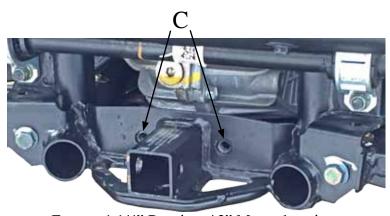

Factory 1 1/4" Receiver / 2" Mount location



"Figure 3"



