

# ARCTIC CAT HDX

## Winch Mount


Winch Mount

PART # 101340

Hardware Kit: HK-325

Kit Components:

Item #	Qty.	Description
1	2	FAIRLEAD SPACERS
2	2	3/8-16 X 1 HEX BOLT
3	2	3/8 FLAT WASHER
4	2	3/8-16 CLIP-ON NUT

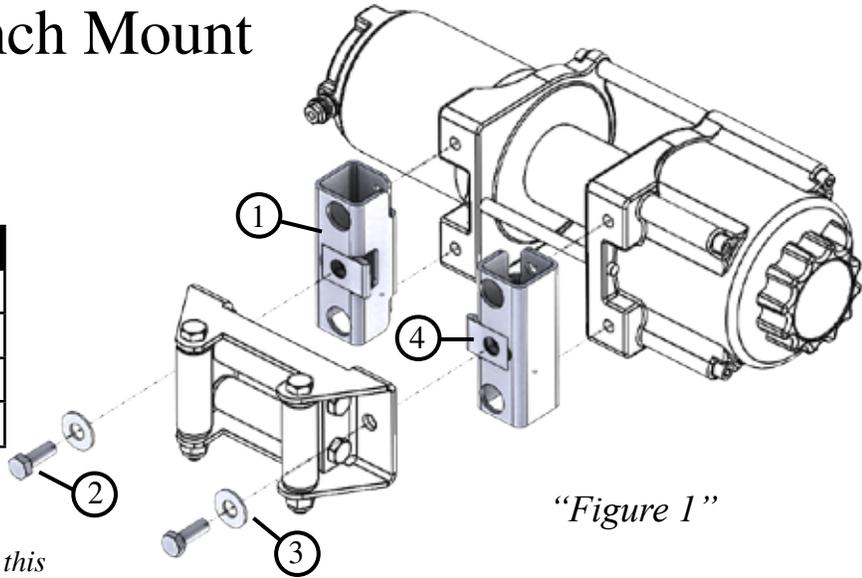





### INSTALLATION INSTRUCTIONS:

*Note: Make sure all of the hardware needed to complete this mount are in the package. Depending on your winch you may have extra hardware left over when finished installing. Read through and understand the instructions before installing.*


1. Cut out the plastic grill covering the winch mount. Follow the line shown in [Figure 2](#).

**IF YOU HAVE A WIDE WINCH WITH A BOLT PATTERN OF 6.60 x 3" SKIP TO STEP 5. ON Pg 2.**

2. Place your winch up behind the front bumper behind the grill. Line the winch bolt holes up with the stock mounting holes. Per Orientation Shown in [Figure 1](#) & holes in [Figure 3](#).
3. Set the Fairlead Spacers up to the front of the grill. Line up the mount to holes (A) and **make sure** that the clip-on nuts (4) are facing in. Shown in [Figures 3 & 4](#).
4. Insert the winch bolts (included with your winch) through the Fairlead Spacers, the winch mount, and into the winch.

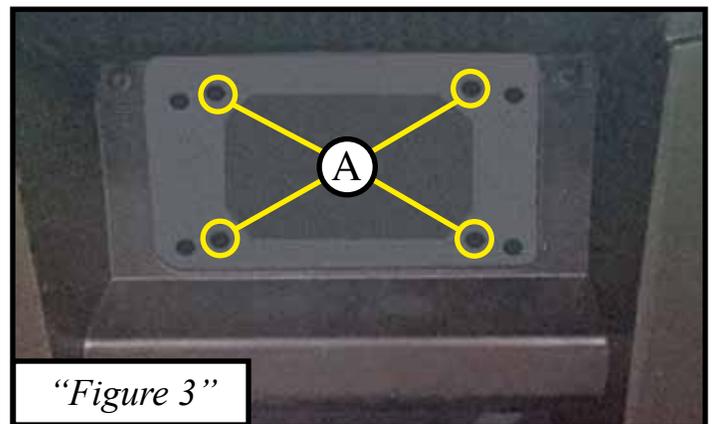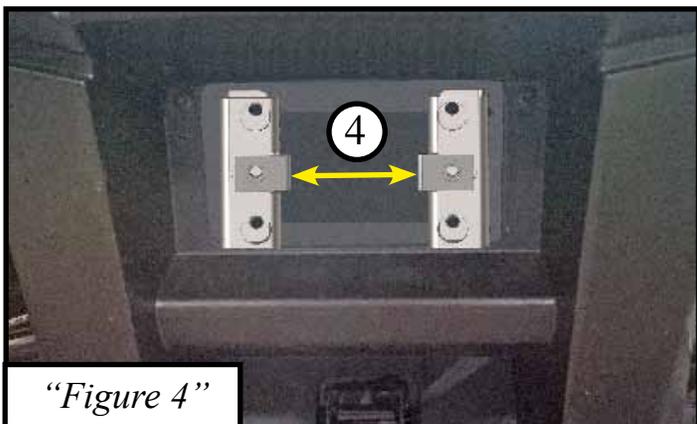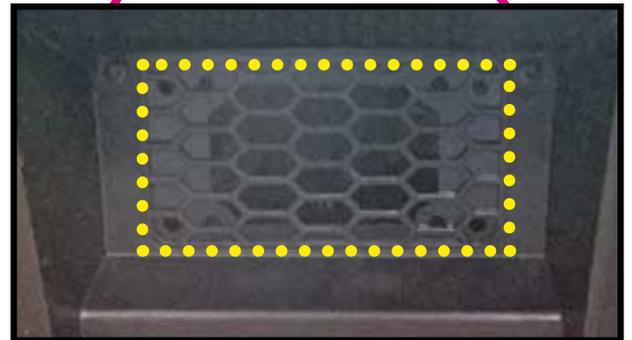
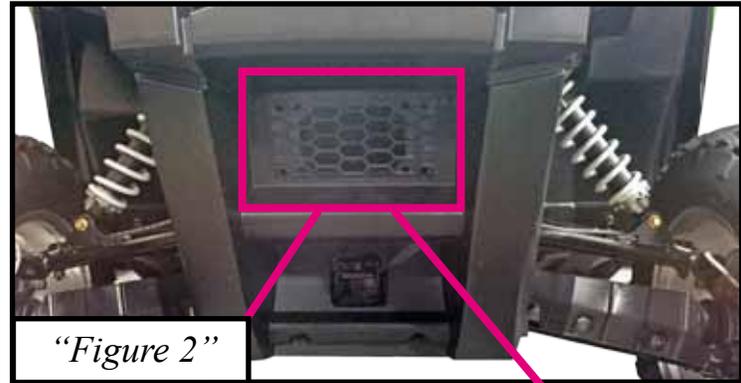


- Place your winch up behind the front bumper behind the grill. Line the winch bolt holes up with the stock mounting holes. Per Orientation Shown in [Figure 1](#) & holes in [Figure 5](#).
- Set the Fairlead Spacers up to the front of the grill. Line up the mount to the Wide holes (B) and **make sure** that the clip-on nuts (4) are facing out. Shown in [Figures 5 & 6](#).
- Insert the winch bolts (included with your winch) through the Fairlead Spacers, the winch mount, and into the winch.

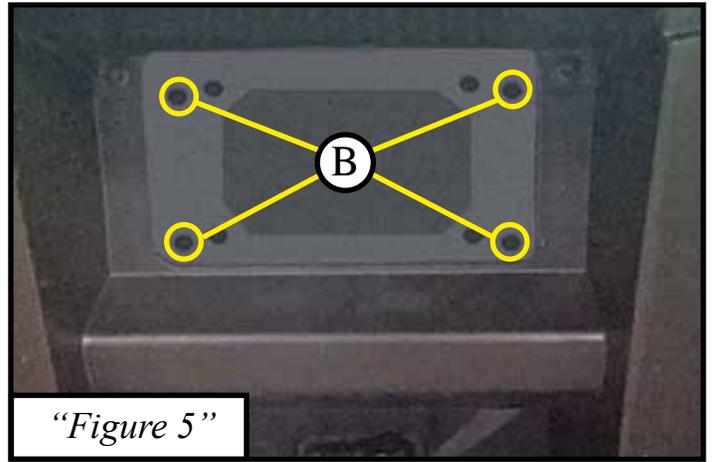

### ATTACHING THE ROLLER FAIRLEAD

- Line the fairlead roller up to the clip-on nuts and bolt together using the 3/8-16 bolts (2). Shown in [Figure 7](#).

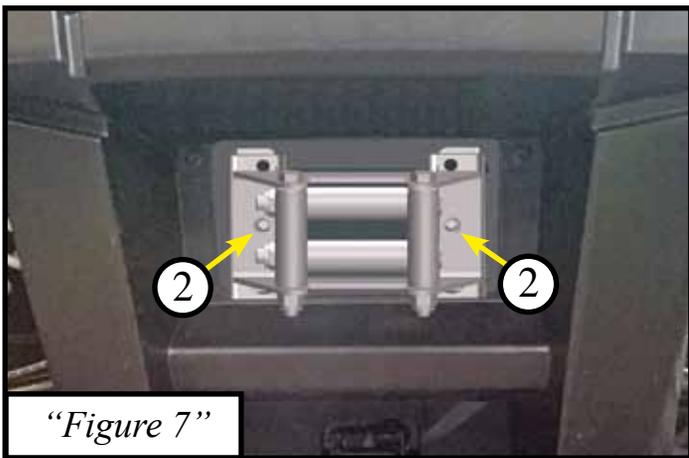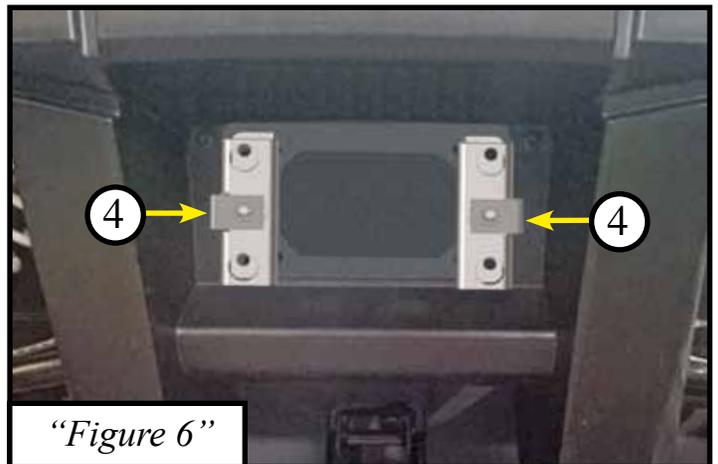

### WIRING INFORMATION

- The battery location is under the drivers seat. Shown in [Figure 8](#).
- We recommend mounting the contactor on the inside of the battery tray. You will need to remove the lid covering the battery.
- Use the wiring diagram in your winch manual to see how the winch is wired.

