





**FRONT OR BACK QUICK CONNECT WIRING LAYOUT**

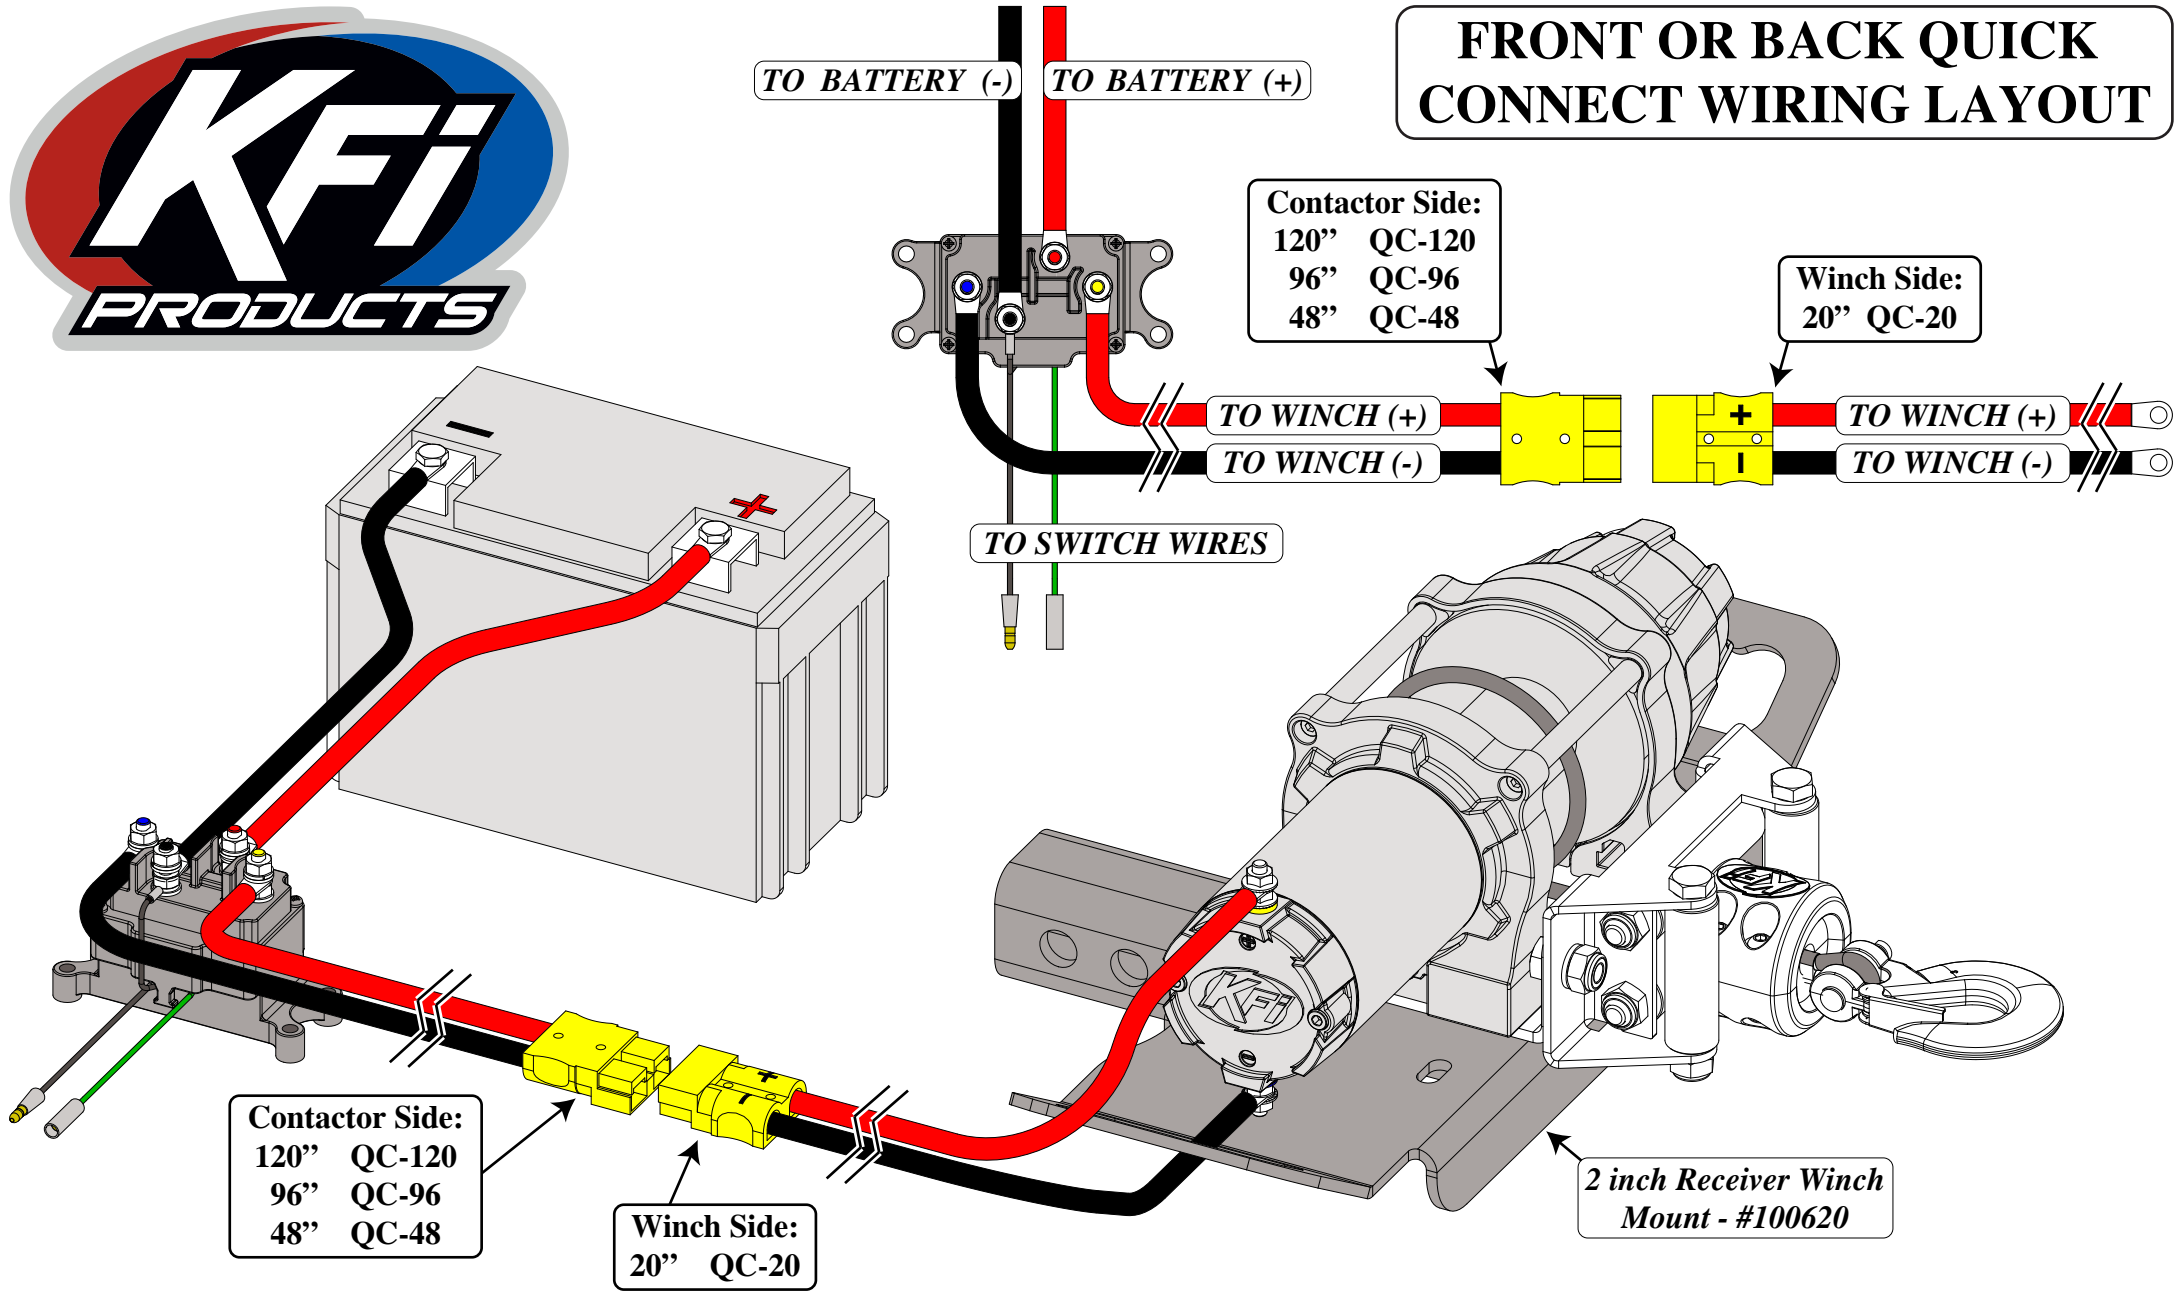

Dual QC layout allows for a winch to be used on either the *FRONT* or *REAR* of the machine. Both locations are run by the same contactor and switch.

Only ONE location can be used at a time.

# DUAL OPTION QUICK CONNECT WIRING LAYOUT

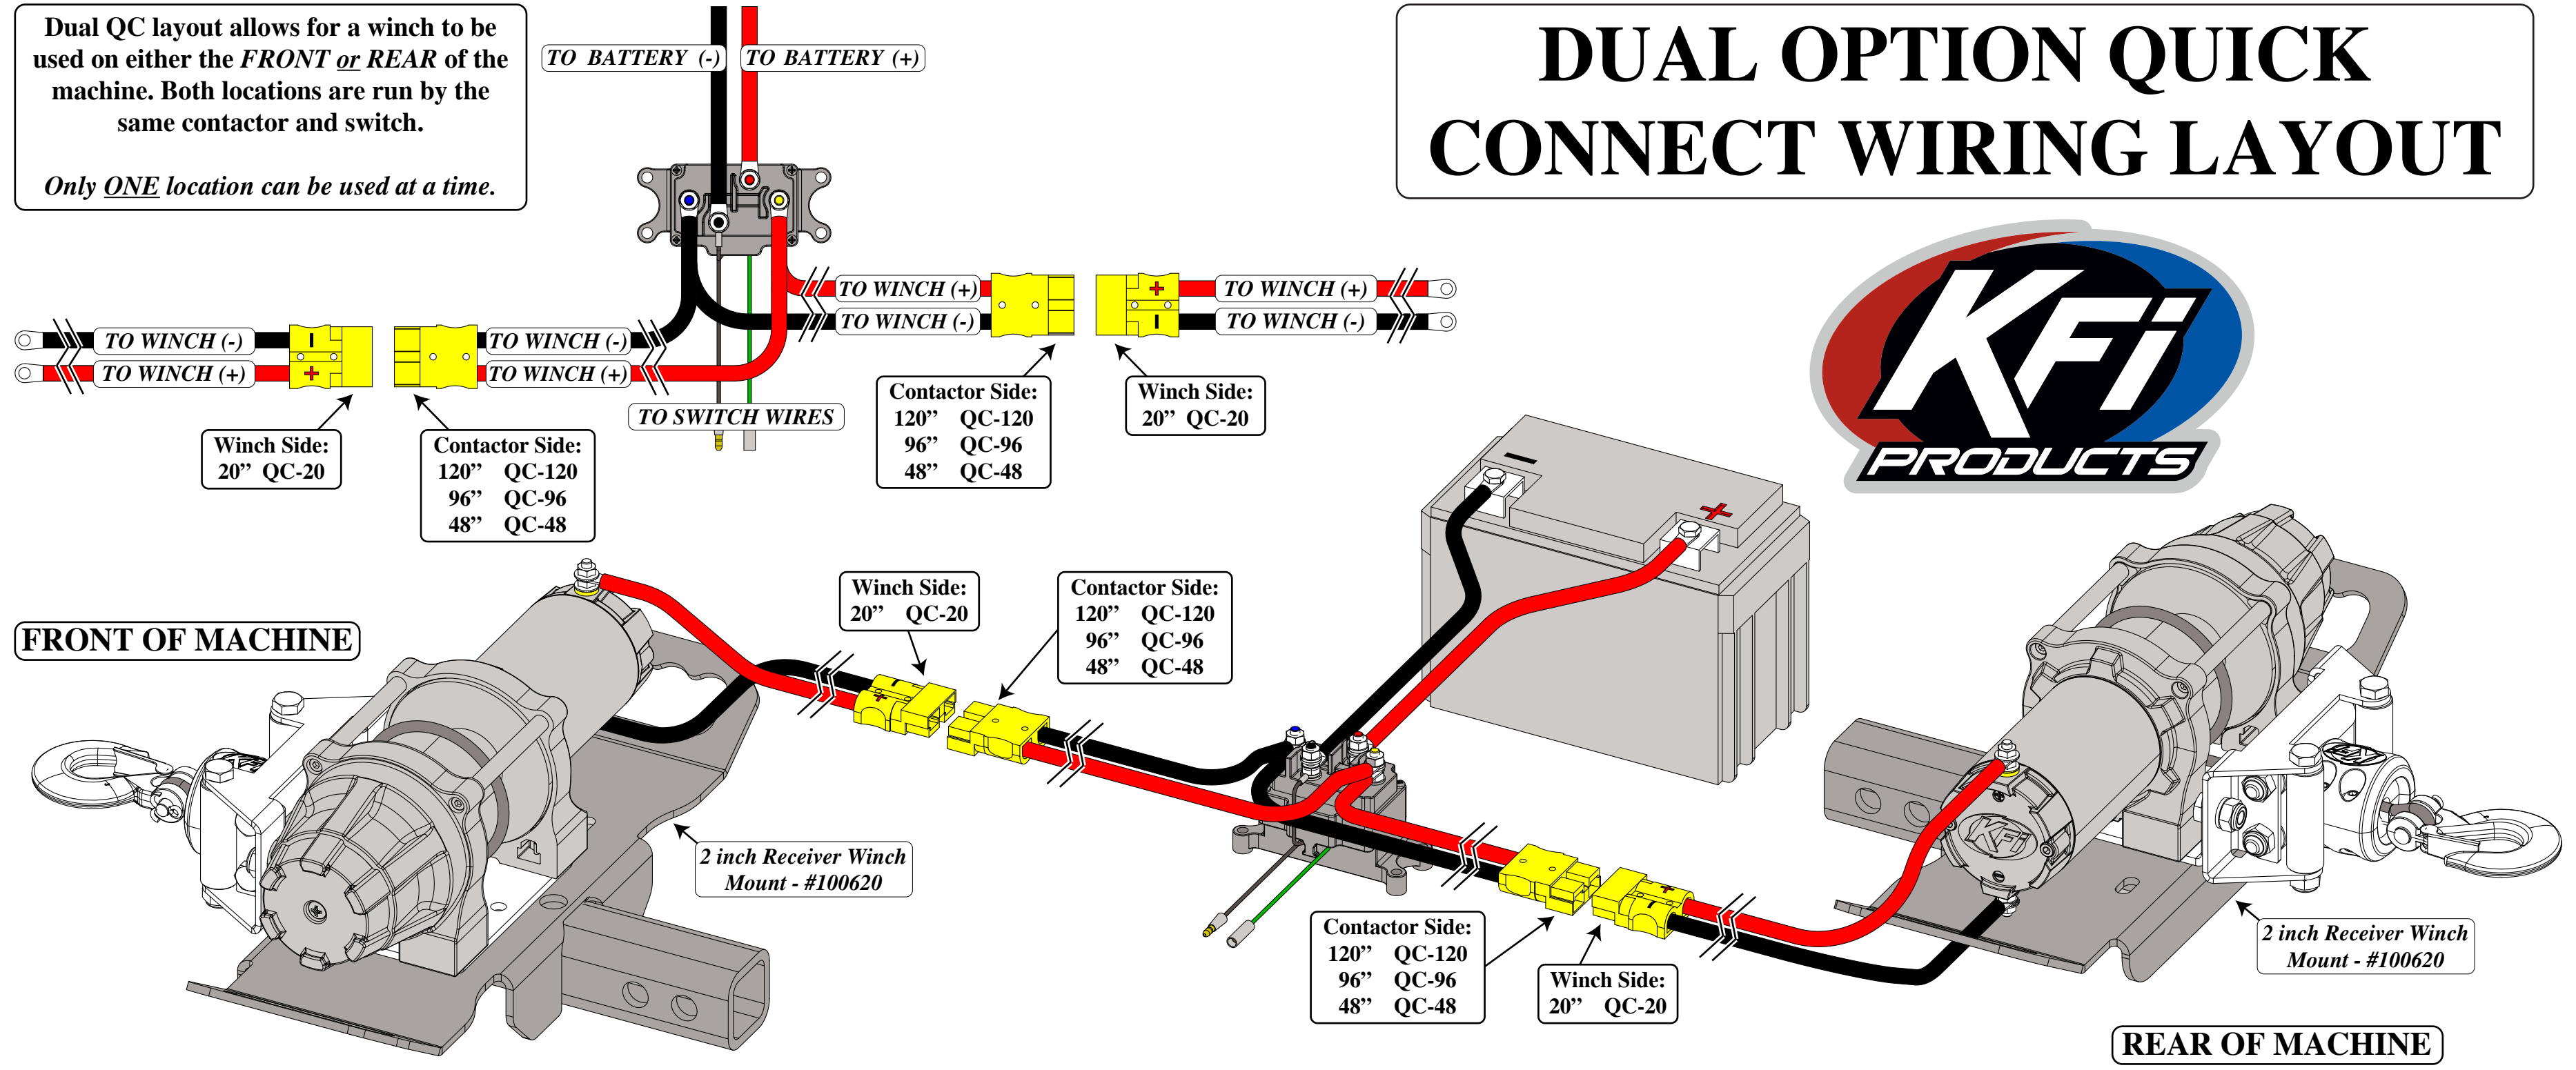

**FRONT OF MACHINE**

**REAR OF MACHINE**

2 inch Receiver Winch Mount - #100620

2 inch Receiver Winch Mount - #100620

Winch Side:  
20" QC-20

Contactor Side:  
120" QC-120  
96" QC-96  
48" QC-48

Contactor Side:  
120" QC-120  
96" QC-96  
48" QC-48

Winch Side:  
20" QC-20

Winch Side:  
20" QC-20

Contactor Side:  
120" QC-120  
96" QC-96  
48" QC-48

Contactor Side:  
120" QC-120  
96" QC-96  
48" QC-48

Winch Side:  
20" QC-20